




Surface installation

The detector is fixed with an adhesive provided on its back.
Two screws are used for the magnet.



Turning on the device

Initially, the detector is provided with a plastic strip to remove, allowing the connection of the included battery.

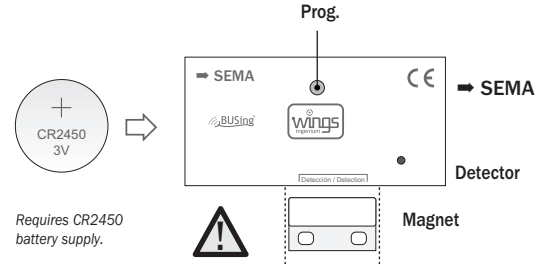

Requires CR2450 battery supply.

SEMA maintenance

Must check and/or replace the batteries at least once every two years.

Window or Door Location (depending on frame type). Orientation possibilities

